



- Maximized strength
- Maximized durability
- Maximized performance



AAEDT 30K
Shown with optional chain down stops and rear-mount shocks



AAEDL 30K
Shown with optional chain down stops, rear-mount shocks and UBL™ UNDER BEAM LIFT™

An INTRAAX® for rigorous applications

The world leader in trailer air suspensions, Hendrickson delivers the first integrated 30,000-pound structural capacity system for severe-duty and heavy-hauling applications.

INTRAAX extreme-duty systems meet fleets' demands for tough off-road and other severe operating environments where maximum strength and durability are required. Ride heights range from 14 to 17 inches for the top-mount (AAEDT 30K) and from 9 to 19 inches for the low-ride height / liftable (AAEDL 30K).

To learn more about INTRAAX AAEDT, call 866.743.3247 or visit www.hendrickson-intl.com



INTRAAX® AAEDT 30K / AAEDL 30K Features and Benefits

Advanced Axle Wrap and Window Weld

- Provides optimal structural integrity

Low Pressure Air Springs with Steel Piston

- Rapid air up time
- Superb ride quality

Industry's First Standard Trailer Cam Tube System™


- Enhances S-cam alignment and helps extend life of brake components
- Short 10-inch S-cam reduces windup and bushing wear for responsive, consistent stopping power

Neutral-toe Axle

- Helps increase fuel economy and tire life
- Straight tracking

TRI-FUNCTIONAL® Bushings

- Controls vertical, horizontal and roll forces of trailer
- Optimizes ride softness, control and stability
- Standard cap-style bushing tube spacer




QUIK-ALIGN® Pivot Connection

- Fast and easy axle alignment
- Requires no welding or special tools

Brake Component Mounting

- Welded to trailing arms rather than axle; minimizes axle stress

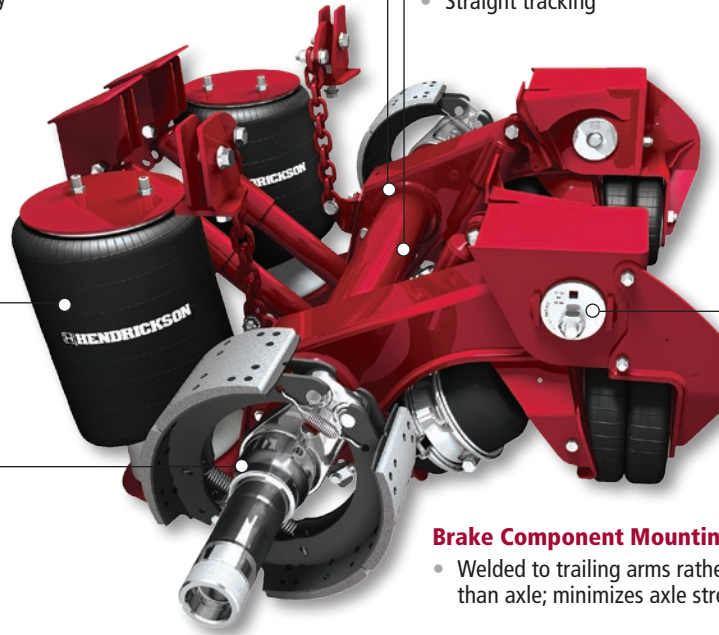

Value-Added Options

- RTR® READY-TO-ROLL® wheel-end options reduce weight, enhance durability and lower maintenance
 - HXL3® Hendrickson Extended-Life 3-year System™ features a three-year limited on-highway warranty*
 - HXL5® Hendrickson Extended-Life 5-year System™ features a five-year limited on-highway warranty*
 - HXL7® Hendrickson Extended-Life 7-year System™ features a seven-year limited on-highway warranty*
- TIREMAAX® tire inflation system helps maximize tire life and maintain peak fuel mileage
- HXS® Hendrickson Extended Service™ brakes extend intervals between brake service
- UBL™ UNDER BEAM LIFT™ is a lightweight mechanism which offers cost savings and operational flexibility
- Optional rear-mount shock absorbers available
- Optional chain down stops available

See RTR READY-TO-ROLL Wheel-End flyer - L1200

See TIREMAAX PRO Brochure - L1199

See UBL UNDER BEAM LIFT Flyer - L727

*Contact your local Hendrickson representative for complete warranty terms, conditions and limitations. Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.

Specifications

MODEL	MAXIMUM CAPACITY (lbs.)	AXLE RATING (lbs.)	AXLE DIAMETER (Inches)	RIDE HEIGHTS (Inches)	APPLICATION WEIGHT (lbs.)
AAEDT	30,000	30,000	5	14, 15, 16, 17	682
AAEDL	30,000	30,000	5	9, 12, 14, 15, 16, 17, 19	662

Ratings for brakes and wheel-end components differ depending upon options chosen.

Call your trailer dealer or Hendrickson at **330.489.0045** or **866.RIDEAIR (743.3247)** for additional information.



www.hendrickson-intl.com

TRAILER COMMERCIAL VEHICLE SYSTEMS

2070 Industrial Place SE
Canton, OH 44707-2641 USA
866.RIDEAIR (743.3247)
330.489.0045 • Fax 800.696.4416

Hendrickson Canada

250 Chrysler Drive, Unit #3
Brampton, ON Canada L6S 6B6
800.668.5360
905.789.1030 • Fax 905.789.1033

Hendrickson Mexicana

Circuito El Marqués Sur #29
Parque Industrial El Marqués
Pob. El Colorado, Municipio El Marqués,
Querétaro, México C.P. 76246
+52 (442) 296.3600 • Fax +52 (442) 296.3601