


ITEM	PART NO.	DESCRIPTION	QTY.
1	A-23588	AIR PILOTED VALVE (3 WAY)	1
2	L373	CAUTION STICKER	1
3	DWG C-3714	AK-54 AIR KIT DRAWING	1
4	A-27360	BARBED TUBE FITTING	1
5	A-27361	3/8 " ID TUBE	1

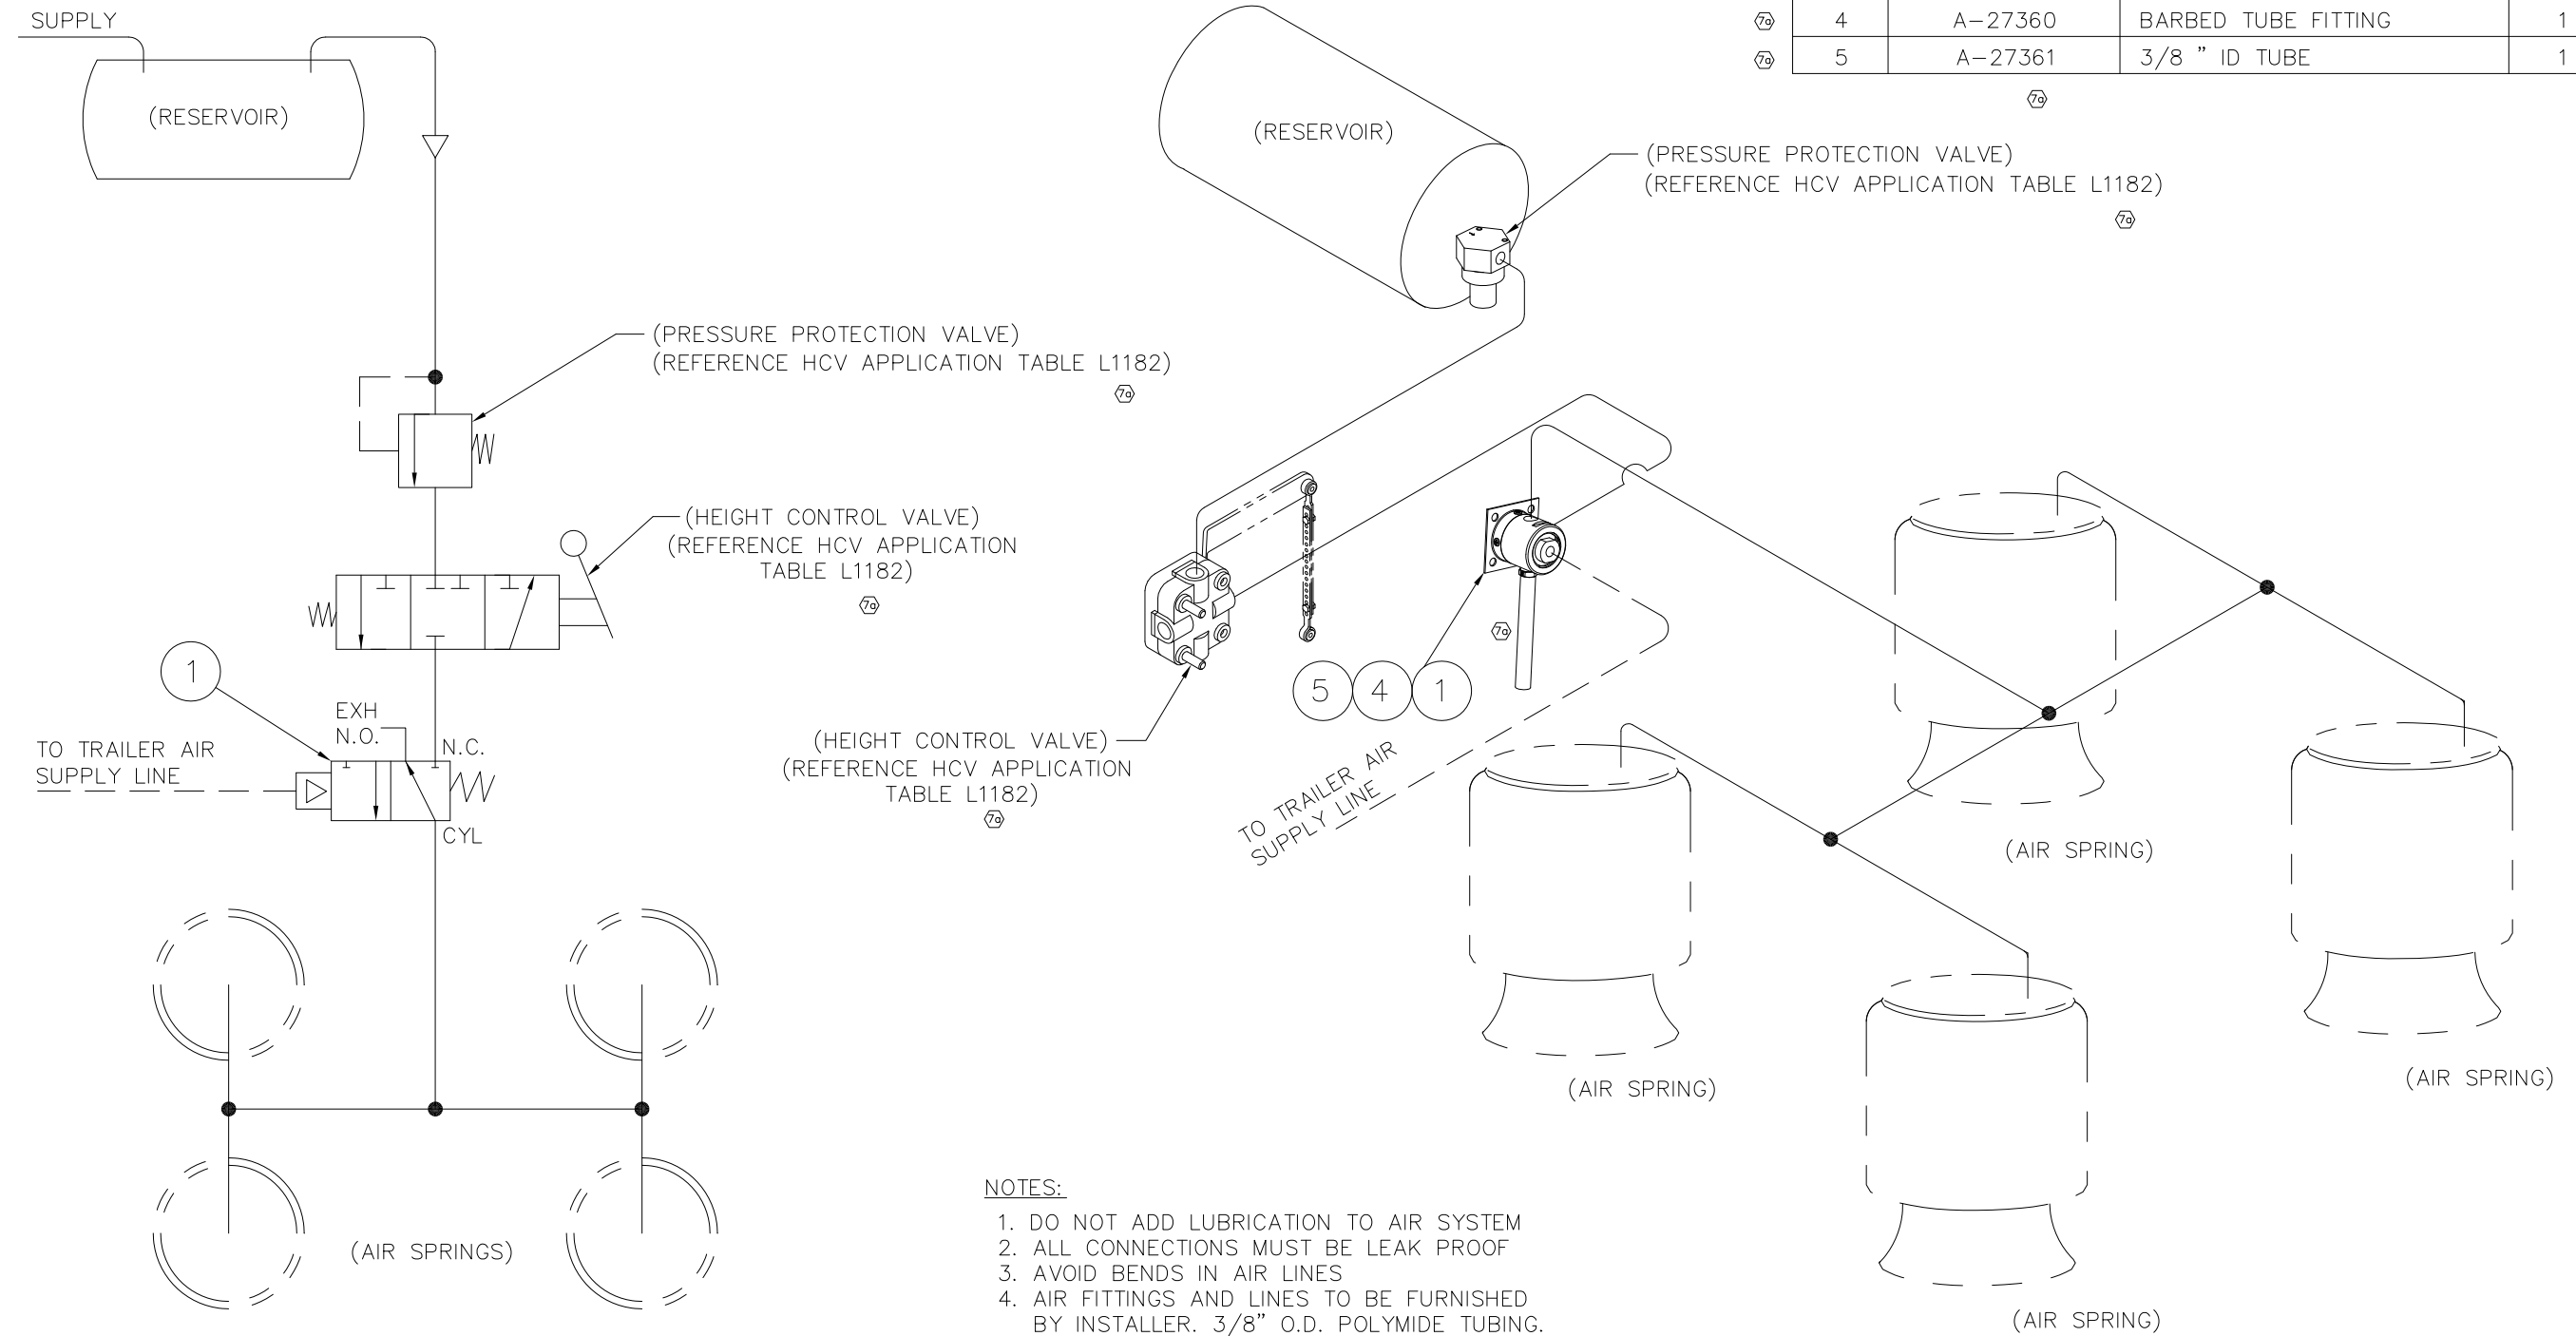

- NOTES:**
- DO NOT ADD LUBRICATION TO AIR SYSTEM
 - ALL CONNECTIONS MUST BE LEAK PROOF
 - AVOID BENDS IN AIR LINES
 - AIR FITTINGS AND LINES TO BE FURNISHED BY INSTALLER. 3/8" O.D. POLYIMIDE TUBING.
 - APPLICATION - ALL SUSPENSION MODELS
 - THIS KIT TO BE USED IN CONJUNCTION WITH AN HCV KIT REFERENCE L1182
 - WEIGHT: .41

OPERATION

- WHEN THE PARKING BRAKES ARE RELEASED OR THE GLAD HAND IS CONNECTED, THE PILOT VALVE OPENS ALLOWING AIR TO FLOW TO THE AIR SPRINGS.
- WHEN THE PARKING BRAKES ARE ENGAGED OR THE GLAD HAND IS DISCONNECTED THE PILOT VALVE CLOSES EXHAUSTING THE AIR SPRINGS.

FUNCTION
AIR DUMP USED WITH AN HCV KIT REFERENCE L1182

This Print remains the property of Hendrickson. All information contained thereon is confidential. It is loaned, subject to return on demand and on express condition that it is not to be copied or used directly or indirectly for any purpose other than the purpose for which it has been loaned to you.

