

TECHNICAL PROCEDURE

TRAILER SUSPENSION SYSTEMS


SUBJECT: Plumbing the New
Three-way Push / Pull Valve

LIT NO: L1146

DATE: September 2009

Earlier this year, Hendrickson Trailer Suspension Systems introduced a new three-way push / pull valve to replace the one used in AK-147 and AK-148 manual dump kits. At that time, the new valve was described as identical to the one being replaced. Although the valve functions properly, it has come to our attention that the new valve plumbing orientation is not identical to the "old" valve.

For the handle operation to remain consistent with the old valve, the exhaust must be plumbed to the port closest to the handle on the new valve as shown below.

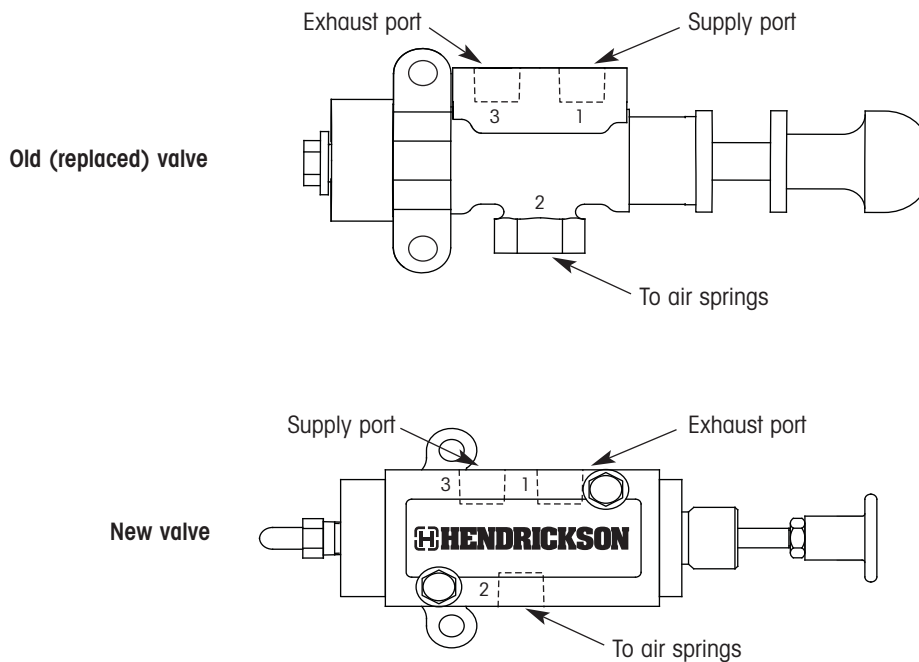

www.hendrickson-intl.com

HENDRICKSON

Trailer Suspension Systems
250 Chrysler Drive, Unit #3
Brampton, ON Canada L6S 6B6
905.789.1030
Fax 905.789.1033

Trailer Suspension Systems 866.RIDEAIR (743.3247)
2070 Industrial Place SE 330.489.0045
Canton, OH 44707-2641 USA Fax 800.696.4416

Hendrickson Mexicana
Av. Industria Automotriz #200
Parque Industrial Sliva Aeropuerto
Apodaca, N.L., México C.P. 66600
+52 (81) 8288.1300
Fax +52 (81) 8288.1301