

- Trusted name
- Lightweight slider and superior axle design
- Proven design for platform and drop-deck trailers

**Trusted name**

Worldwide OEMs, fleets and owner operators put their trust in INTRAAX® integrated suspension systems. INTRAAX®-SP platform slider models maintain a smooth ride, superior performance and the durability needed to protect cargo and keep equipment operating at peak performance. Drawing on patented INTRAAX technology and unmatched slider box design experience, Hendrickson's platform slider systems offer superior weight savings.

**Lightweight slider and superior axle design**

The lightweight INTRAAX-SP system weighs substantially less than other systems – as much as 800 pounds less than other tandem air suspension sliders and up to 100 pounds less than mechanical sliders. In addition, all INTRAAX-SP models are standard with LDA™ Large-Diameter Axles, so fleets can move even more cargo on each haul. The LDA axle is designed to reduce weight, maximize durability, increase stiffness and provide greater roll stability.

**Proven design for platform and drop-deck trailers**

INTRAAX-SP models equip fleets with a durable and low maintenance slider system designed specially for platform and drop-deck trailers. The AAZ models feature a combination of a smooth-sliding box and the road-proven INTRAAX suspension system. The "Z-rail" slider box fits neatly between trailer I-beams with lock-pins engaging through holes in the web of the beams.

To learn more about INTRAAX-SP, call 866.743.3247 or visit [www.hendrickson-intl.com](http://www.hendrickson-intl.com)

# INTRAAX®-SP Platform Slider System Features and Benefits

## "Z-rail" Slider Box

- Adaptable to various I-beam configurations
- Fits neatly between trailer I-beams

## Neutral-toe Axle

- Helps increase fuel economy and tire life
- Straight tracking

## LDA™ Large-Diameter Axle


- Trims weight compared to five-inch axle, allowing more cargo per load
- Bending and torsional stiffness increased for rugged durability
- Greater roll stability
- Reduces deflection under load

## Advanced Axle Wrap and Window Weld

- Provides optimal structural integrity

## Industry's First Standard Trailer Cam Tube System™

- Enhances S-cam alignment and helps extend life of brake components
- Short 10-inch S-cam reduces windup and bushing wear for responsive, consistent stopping power

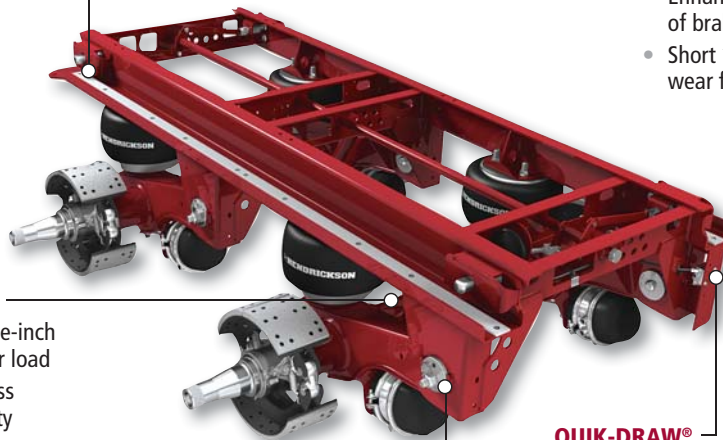

## TRI-FUNCTIONAL® Bushing

- Controls vertical, horizontal, and roll forces of trailer
- Optimizes ride softness, control, and stability

## QUIK-ALIGN® Pivot Connection

- Fast and easy axle alignment
- Requires no welding or special tools

## QUIK-DRAW® Pneumatic Pin-pull Mechanism

- Automatic reset engages pins when parking brake releases
- Driver Friendly – finger-tip operation
- Helps reduce driver strain, enhances productivity and can reduce workman's comp claims

## Value-Added Options

- RTR® READY-TO-ROLL® wheel-end options reduce weight, enhance durability and lower maintenance
  - HXL3® Hendrickson Extended-Life 3-year System™
  - HXL5® Hendrickson Extended-Life 5-year System™
  - HXL7® Hendrickson Extended-Life 7-year System™

See RTR READY-TO-ROLL Wheel-End flyer - L1200

- TIREMAAX® tire inflation system helps maximize tire life and maintain peak fuel mileage
- HXS® Hendrickson Extended Service™ brakes extend intervals between brake service
- Air disc brakes available on AAZNT models only

See TIREMAAX PRO Brochure - L1199

## Specifications

	AAZNT 23K	AAZNT 46K	AAZNT 69K	AAZL 23K	AAZL 46K	
System Capacity	23,000 lbs.	46,000 lbs.	69,000 lbs.	23,000 lbs.	46,000 lbs.	
Axle	Arrangement	Single	Tandem	Tridem	Single	Tandem
	Spacing	N/A	49-, 60- or 72-inch	60- or 72-inch	N/A	49-, 60- or 72-inch
	Track	71.5- or 77.5-inch			71.5 or 77.5 inch	
I-Beam Compatibility	37-, 38-, 43- or 44-inch centers			37-, 38-, 43- or 44-inch centers		
Flange Thickness	.375- to .75-inch			.375- to .75-inch		
Flange Width	4- to 5-inch			4- to 5-inch		
Ride Heights	13.5- to 17-inch			6.5- to 12-inch		
Suspension	INTRAAX tapered beam AANT 23K			INTRAAX low-ride AAL 23K		
Pin-pull Mechanism	QUIK-DRAW			QUIK-DRAW		

Call your trailer dealer or Hendrickson at **330.489.0045** or **866.RIDEAIR (743.3247)** for additional information.



www.hendrickson-intl.com

### TRAILER COMMERCIAL VEHICLE SYSTEMS

2070 Industrial Place SE  
Canton, OH 44707-2641 USA  
866.RIDEAIR (743.3247)  
330.489.0045 • Fax 800.696.4416

### Hendrickson Canada

250 Chrysler Drive, Unit #3  
Brampton, ON Canada L6S 6B6  
800.668.5360  
905.789.1030 • Fax 905.789.1033

### Hendrickson Mexicana

Circuito El Marqués Sur #29  
Parque Industrial El Marqués  
Pob. El Colorado, Municipio El Marqués,  
Querétaro, México C.P. 76246  
+52 (442) 296.3600 • Fax +52 (442) 296.3601