

- Boost trailer productivity
- Increase value
- Optimized design for rear-discharge tankers



To learn more about INTRAAX RCA,
call 866.743.3247 or visit
www.hendrickson-intl.com

INTRAAX® RCA System Features and Benefits

Industry's First Standard Trailer Cam Tube System™


- Enhances S-cam alignment and helps extend life of brake components
- Short 10-inch S-cam reduces windup and bushing wear for responsive, consistent stopping power

TRI-FUNCTIONAL® Bushing

- Controls vertical, horizontal and roll forces of trailer
- Optimizes ride softness, control and stability

Advanced Axle Wrap and Window Weld

- Provides optimal structural integrity
- Leading structural warranty* supported by a wide network of OEMs, dealers, distributors and outstanding Hendrickson technical support staff

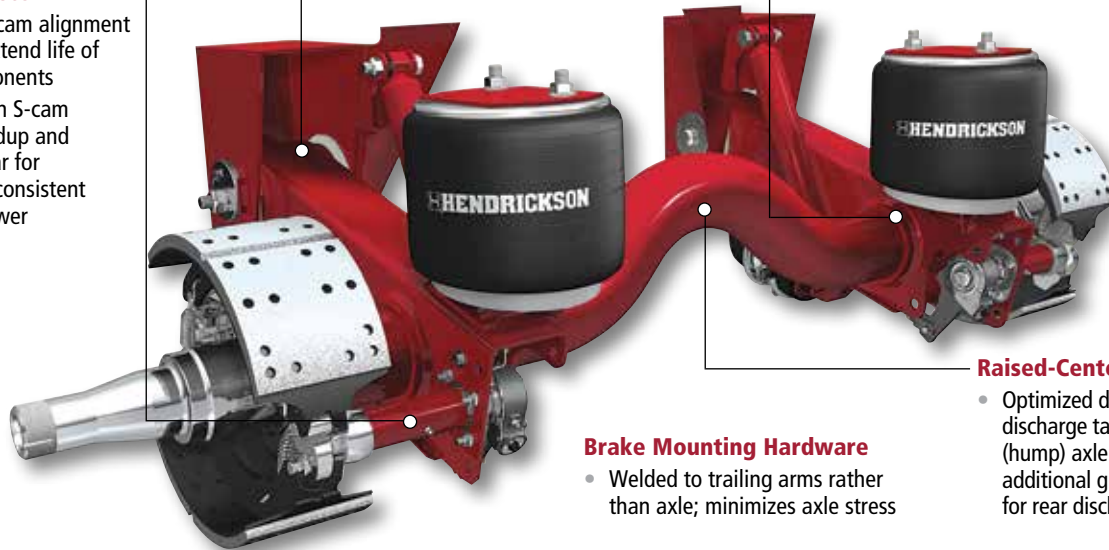

Brake Mounting Hardware

- Welded to trailing arms rather than axle; minimizes axle stress

Raised-Center Axle

- Optimized design for rear-discharge tankers. The raised (hump) axle section allows for additional ground clearance for rear discharge tube.

Value-Added Options

- RTR® READY-TO-ROLL® wheel-end options reduce weight, enhance durability and lower maintenance
 - HXL3® Hendrickson Extended-Life 3-year System™ features a three-year limited on-highway warranty*
 - HXL5® Hendrickson Extended-Life 5-year System™ features a five-year limited on-highway warranty*
 - HXL7® Hendrickson Extended-Life 7-year System™ features a seven-year limited on-highway warranty*
- TIREMAAX® tire inflation system helps maximize tire life and maintain peak fuel mileage
- HXS® Hendrickson Extended Service™ brakes extend intervals between brake service
- Cap-style bushing tube spacers are recommended in tanker applications
- Air disc brakes available including Hendrickson's MAXX22T™ optimized trailer air disc brake

See RTR READY-TO-ROLL Wheel-End flyer - L1200

See TIREMAAX PRO Brochure - L1199

See MAXX22T flyer - L1239

*Contact your local Hendrickson representative for complete warranty terms, conditions and limitations.

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.

Specifications

Model	Suspension Capacities (pounds)	Axle Diameter (inches)	Tracks (inches)	Ride Heights (inches)	Base Model Weight (pounds)
AAT 23K	23,000	5	71.5 and 77.5	13.5, 14, 15, 16, 17, 18, 19	597
AAT 25K	25,000 ¹				
AAL 23K	23,000	5	77.5	8, 9, 12, 14, 15, 16, 17, 19	649
AAL 25K	25,000 ¹				

¹Axle rated only for 23,000 pounds. Brakes rated separately.¹

Call your trailer dealer or Hendrickson at **330.489.0045** or **866.RIDEAIR (743.3247)** for additional information.



www.hendrickson-intl.com

TRAILER COMMERCIAL VEHICLE SYSTEMS

2070 Industrial Place SE
Canton, OH 44707-2641 USA
866.RIDEAIR (743.3247)
330.489.0045 • Fax 800.696.4416

Hendrickson Canada

250 Chrysler Drive, Unit #3
Brampton, ON Canada L6S 6B6
800.668.5360
905.789.1030 • Fax 905.789.1033

Hendrickson Mexicana

Circuito El Marqués Sur #29
Parque Industrial El Marqués
Pob. El Colorado, Municipio El Marqués,
Querétaro, México C.P. 76246
+52 (442) 296.3600 • Fax +52 (442) 296.3601