

STEERTEK™ NXT

Fabricated Front Steer Axle for International



- Reliable, dependable performance and superior warranty
- Available with integrated air disc brake knuckles



Based on proprietary design and manufacturing technologies that provide a superior strength to weight ratio, STEERTEK™ NXT serves as the durable, lightweight alternative to traditional I-beam axles. The patented two-piece knuckle contributes to outstanding turning radius and reduced maintenance. Chosen by International as the standard steer axle for RH and LT series, STEERTEK NXT with IADB knuckle is available in capacities from 12,350 lbs. to 13,200 lbs. and is also available in capacities of 12,350 lbs. to 14,000 lbs. for bolt-on disc and drum brakes

To learn more about STEERTEK NXT,
call 855.743.3733 or visit www.hendrickson-intl.com

 **HENDRICKSON**
The World Rides On Us®


STEERTEK™ NXT for International® RH™ and LT® Series

Warranty

- STEERTEK™ NXT axles for International Truck RH and LT Models come with a standard 10-year, 1 million mile limited warranty

Standard Position

- Made with pride in Lebanon, KY

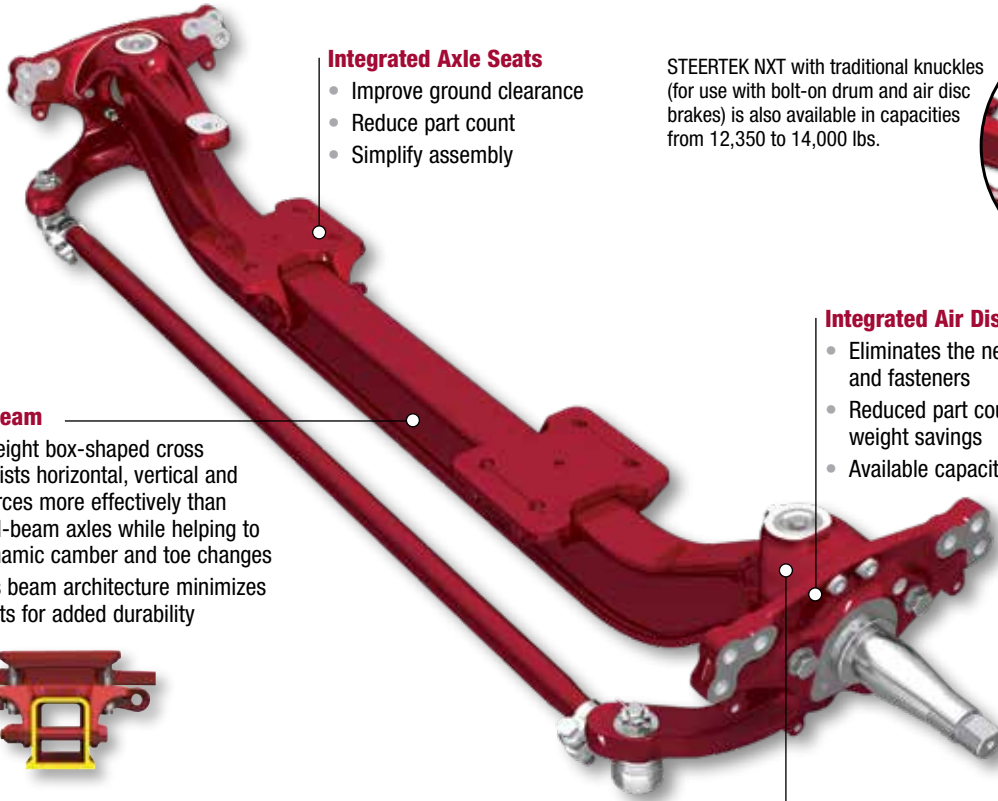

Integrated Axle Seats

- Improve ground clearance
- Reduce part count
- Simplify assembly

STEERTEK NXT with traditional knuckles (for use with bolt-on drum and air disc brakes) is also available in capacities from 12,350 to 14,000 lbs.



Rigid Axle Beam

- The lightweight box-shaped cross section resists horizontal, vertical and twisting forces more effectively than traditional I-beam axles while helping to reduce dynamic camber and toe changes
- Continuous beam architecture minimizes stress points for added durability



Integrated Air Disc Brake Knuckle (IADB)

- Eliminates the need for separate torque plate and fasteners
- Reduced part count allows for greater weight savings
- Available capacities from 12,350 to 13,200 lbs.

Ease of Maintenance

- The unique two-piece knuckle design eliminates the need to remove the kingpin to service the bushings
- Premium kingpin bushings and seals provide enhanced protection from the elements to improve bushing life and extend service intervals up to 100,000 miles**

FEATURE CODE	DESCRIPTION	AVAILABILITY
02AVH	12,350 lbs. IADB (Wide Track)	RH, LT
02AUD	12,350 lbs. (Wide Track)	RH, LT
02AUE	12,350 lbs.	RH, LT
02AVJ	13,200 lbs. IADB (Wide Track)	RH, LT
02AUH	13,200 lbs. (Wide Track)	RH, LT
02AUJ	13,200 lbs.	RH, LT
02AUK	14,000 lbs. (Wide Track)	LT
02AUL	14,000 lbs.	RH, LT

*10-year, 1 million mile limited warranty covers certain structural components only. Warranty coverage applies to the axle beam, steering arm, knuckle assembly and kingpin when used in applications approved by Hendrickson and within the proper guidelines of the product. Warranty does not cover components experiencing normal wear. Contact Hendrickson for full warranty details and limitations.

**Contact Hendrickson for full service interval details and limitations.

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.
All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration.
Contact Hendrickson for additional details regarding specifications, applications, capacities, operation, service and maintenance instructions.

Call Hendrickson at **630.910.2800** or **855.RIDERED (743.3733)** for additional information.



TRUCK COMMERCIAL VEHICLE SYSTEMS
800 South Frontage Road
Woodridge, IL 60517-4904 USA
866.RIDERED (743.3733)
630.910.2800 • Fax 630.910.2899

www.hendrickson-intl.com

www.international.com

45745-366 Rev M 02-25

© 2014 - 2025 Hendrickson USA, L.L.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, L.L.C., or one of its affiliates, in one or more countries. Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected. Printed in United States of America