HINTRAAX[®] AAEDT 30K / AAEDL 30K Extreme-Duty Suspension Systems

- Maximized strength
- Maximized durability
- Maximized performance



AAEDL 30K

Shown with optional chain down stops, rear-mount shocks and UBL[™] UNDER BEAM LIFT[™]

HENDRI

An INTRAAX[®] for rigorous applications

The world leader in trailer air suspensions, Hendrickson delivers an advanced integrated 30,000-pound structural capacity system for severe-duty and heavy-hauling applications.


INTRAAX extreme-duty systems meet fleets' demands for tough off-highway and other severe operating environments where maximum strength and durability are required. Ride heights range from 14 to 17 inches for the top-mount (AAEDT 30K) and from 9 to 19 inches for the low-ride height / liftable (AAEDL 30K).



To learn more about INTRAAX AAEDT, call 866.743.3247 or visit www.hendrickson-intl.com



INTRAAX® AAEDT 30K / AAEDL 30K Features and Benefits

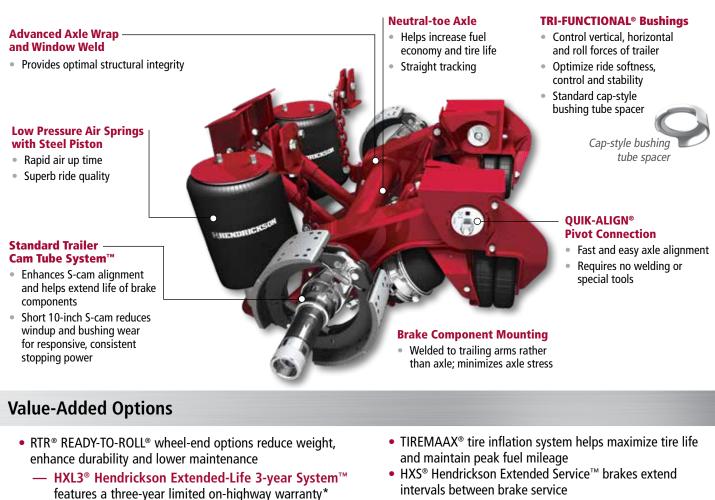

- UBL[™] UNDER BEAM LIFT[™] is a lightweight mechanism which offers cost savings and operational flexibility
- Optional rear-mount shock absorbers available
- Optional chain down stops available

See TIREMAAX PRO Brochure - Literature No. L1199 See UBL UNDER BEAM LIFT Flyer - Literature No. L727

*Contact your local Hendrickson representative for complete warranty terms, conditions and limitations.

Specifications

MODEL	MAXIMUM CAPACITY (lbs.)	AXLE RATING (lbs.)	AXLE DIAMETER (Inches)	RIDE HEIGHTS (Inches)	APPLICATION WEIGHT (lbs.)
AAEDT	30,000	30,000	5	14, 15, 16, 17	682
AAEDL	30,000	30,000	5	9, 12, 14, 15, 16, 17, 19	662

Ratings for brakes and wheel-end components differ depending upon options chosen.

— HXL5[®] Hendrickson Extended-Life 5-vear System[™]

features a five-year limited on-highway warranty*

— HXL7[®] Hendrickson Extended-Life 7-year System[™]

features a seven-year limited on-highway warranty*

See RTR READY-TO-ROLL Wheel-End flyer - Literature No. L1200

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.

All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration. Contact Hendrickson for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.

Call Hendrickson at 330.489.0045 or 866.RIDEAIR (743.3247) for additional information.



 TRAILER COMMERCIAL VEHICLE SYSTEMS

 2070 Industrial Place SE

 Canton, OH 44707-2641 USA

 866.RIDEAIR (743.3247)

 330.489.0045 • Fax 800.696.4416

Hendrickson Canada ULC 2825 Argentia Road, Unit #2 - 4 Mississauga, ON Canada L5N 8G6 800.668.5360 905.789.1030 • Fax 905.802.9423

Hendrickson Mexicana

Circuito El Marqués Sur #29 Parque Industrial El Marqués Pob. El Colorado, Municipio El Marqués, Querétaro, México C.P. 76246 +52 (442) 296.3600 • Fax +52 (442) 296.3601

www.hendrickson-intl.com

L741 Rev I 03-22

© 2000 - 2022 Hendrickson USA, LL.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, LL.C., or one of its affiliates, in one or more countries. Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected.

Printed in United States of America