

COMPOSILITE® EXF

Truck Non-Steerable Lift Axle Suspension System



Hendrickson designed the COMPOSILITE® EXF model to include the same top-of-the-line engineering you have come to expect in the EXS model.

Secondary Bump Stops

- Under extreme axle loading, the secondary bump stop engages, transferring additional load into the axle seat and protecting the beam from potential damage



Primary (airbag) bump stop engages



Under extreme load, secondary bump stop engages

Zero-Torsion Rubber Bushings

- Provides increased durability and bushing life
- Improves overall cost of ownership with less downtime



Inset Lower Beams

- Optimized lateral stiffness
- Eliminates the need for V-rod



EXF axle wrap with window welds (INTRAAX® design technology)



Round tube axle geometry for standard or roll-off models

EXF13 Non-Steerable Lift Axle Suspension

To learn more about COMPOSILITE EXF and EXF Roll-Off call 800.660.2829 or visit www.hendrickson-intl.com

HENDRICKSON
The World Rides On Us®

COMPOSILITE® EXF ROLL-OFF Truck Non-Steerable Lift Axle Suspension System

The COMPOSILITE® EXF Roll-Off family is available in a 13,500-pound capacity. The EXF Roll-Off fits flat to the frame to give maximum clearance from cylinder beams, attachments and sliding components.

Inset Parallelogram Beams

- Lightweight material while helping to ensure proper wheel tracking and to ensure lift plates remain parallel for longer air spring life

In-Line Air Springs


- Maximize packaging space and help remove the risk of possible driveline interference

Scalloped Hanger

- Improves roll-off cylinder clearance

Inside Frame Air Spring Mount

- Improves roll-off cylinder clearance

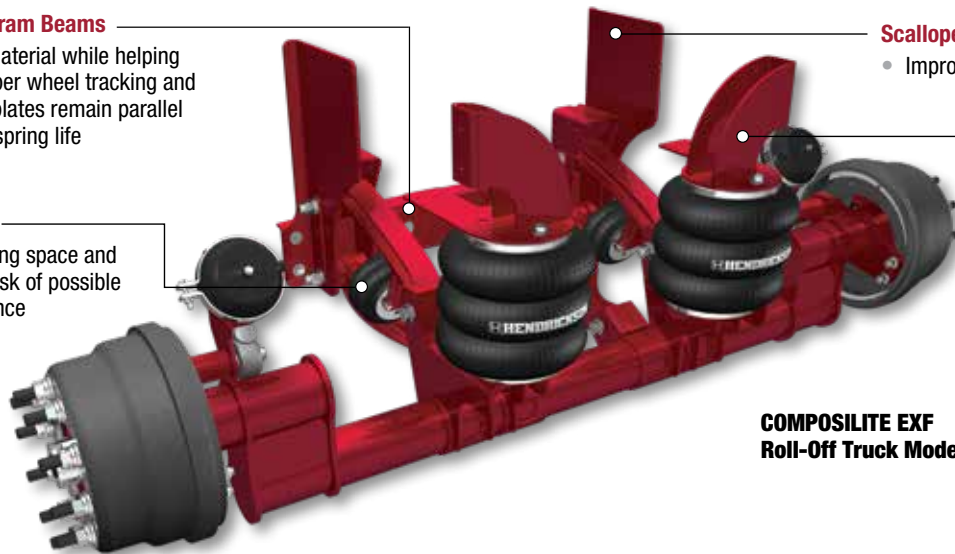

COMPOSILITE EXF
Roll-Off Truck Model

Designed for Optimal Cylinder Clearance

- In-board mount upper air spring plates
- Scalloped hanger (1.75 inches of clearance per side)
- Lift arm spacer (1 inch of clearance per side)



*Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.
All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration.
Contact Hendrickson for additional details regarding specifications, applications, capacities, operation, service and maintenance instructions.*

Call Hendrickson at **800.660.2829** or **800.668.5360** in Canada for additional information.



www.hendrickson-intl.com     

SPECIALTY PRODUCTS -
AUXILIARY AXLE SYSTEMS
277 North High Street
Hebron, OH 43025 USA
800.660.2829
740.929.5600 • Fax 740.929.5601

HENDRICKSON CANADA ULC
2825 Argentina Road, Unit #1 - 4
Mississauga, ON Canada L5N 8G6
800.668.5360
905.789.1030 • Fax 905.802.9423

H850 Rev D 01-25

© 2020 - 2025 Hendrickson USA, L.L.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, L.L.C., or one of its affiliates, in one or more countries. Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected. Printed in United States of America