



TECHNICAL PROCEDURE

TRAILER SUSPENSION SYSTEMS


SUBJECT: CONNEX® ST Stop Bolts

LIT NO: T61003


DATE: May 2024

REVISION:

CONNEX ST Self-Steer Suspension Systems manufactured prior to March 2024 use the 2.5 inch stop bolt and after March 2024 use the 2.0 inch stop bolt. Both stop bolts variants are included within the kit and should be used accordingly depending on the CONNEX ST suspension axle end variant that is being serviced with the kit. Refer to T62001 CONNEX® ST Maintenance Procedures for installation instructions.

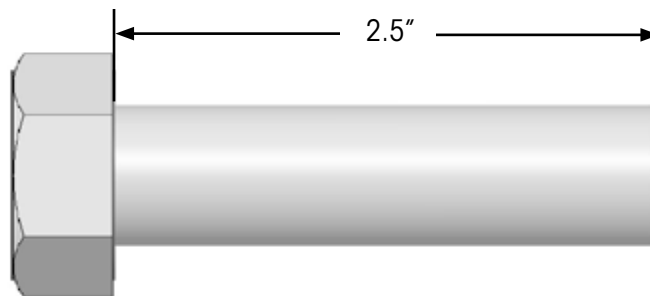

Prior to March 2024
(Bolt measured from under head to end of threads)

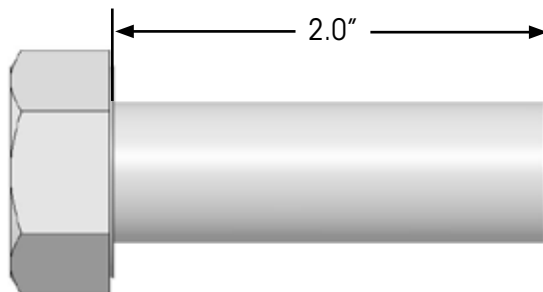

After March 2024
(Bolt measured from under head to end of threads)

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.

Call Hendrickson at 866.RIDEAIR (743.3247) for additional information.



www.hendrickson-intl.com

TRAILER COMMERCIAL VEHICLE SYSTEMS

2070 Industrial Place SE
Canton, OH 44707-2641 USA
866.RIDEAIR (743.3247)
Fax 800.696.4416

Hendrickson Canada

2825 Argentia Rd, Unit #2-4
Mississauga, ON Canada L5N 8G6
800.668.5360
905.789.1030 • Fax 905.812.9423

Hendrickson Mexicana

Circuito El Marqués Sur #29
Parque Industrial El Marqués
Pob. El Colorado, Municipio El Marqués,
Querétaro, México C.P. 76246
+52 (442) 296.3600 • Fax +52 (442) 296.3601

T61003 06-24 CN 043720

© 2024 Hendrickson USA, L.L.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, L.L.C., or one of its affiliates, in one or more countries.

Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected.

Printed in United States of America