

EXS and EXF lift axle suspension systems for trailer applications

Hendrickson's COMPOSILITE® EX lift axles offer brake and wheel-end options that match the INTRAAX® family of trailer axles. You can now have the equivalent Hendrickson TIREMAAX®, HXL, and Hendrickson MAXX22T™ air disc brakes packages across all trailer positions.

COMPOSILITE® EXS Wheel-End Options

13K DRUM BRAKE OPTIONS			
Spindle / Hub Material	TIREMAAX®	HXL3® / HXL5® Wheel-Ends	 Standard Wheel-End
N-Spindle / DI Single Wheels Dished In	Yes	Yes	Yes
FF-Spindle / DI, ADI or AL Single Wheels Dished In	Not Available	Not Available	Yes
13K DISC BRAKE OPTIONS - BENDIX			
Spindle / Hub Material	TIREMAAX	HXL3 / HXL5 Wheel-Ends	 Standard Wheel-End
FF-Spindle / DI or AL Single Wheels Dished In	Not Available	Not Available	Yes
20K DRUM BRAKE OPTIONS			
Spindle / Hub Material	TIREMAAX	HXL3 / HXL5 Wheel-Ends	 Standard Wheel-End
FL-Spindle / DI Single Wheels Dished In	Not Available	Not Available	Yes
20K DISC BRAKE OPTIONS - BENDIX			
Spindle / Hub Material	TIREMAAX	HXL3 / HXL5 Wheel-Ends	 Standard Wheel-End
FL-Spindle / DI or AL Single Wheels Dished In	Not Available	Not Available	Yes




**EXS13 Steerable
Trailer Model**





To learn more about COMPOSILITE EXS and EXF, call 800.660.2829 or visit www.hendrickson-intl.com

COMPOSILITE® EXF Wheel-End Options

DRUM BRAKE OPTIONS			
Spindle / Hub Material	TIREMAAX®	HXL3® / HXL5® Wheel-Ends	 Standard Wheel-End
N-Spindle / DI Single Wheels Dished In	Yes 13,500 lbs. Axle Rating	Yes 13,500 lbs. Axle Rating	Yes 13,500 lbs. Axle Rating
P-Spindle / DI Single Wheels Dished Out	Yes 13,200 lbs. Axle Rating	Yes 13,200 lbs. Axle Rating	Yes 13,200 lbs. Axle Rating
FF-Spindle / DI or AL Single Wheels Dished In	Not Available	Not Available	Yes 13,500 lbs. Axle Rating
DISC BRAKE OPTIONS - HENDRICKSON MAXX22T™			
Spindle / Hub Material	TIREMAAX	HXL3 / HXL5 Wheel-Ends	 Standard Wheel-End
P-Spindle / DI Single Wheels Dished Out	Yes 12,200 lbs. Axle Rating	Yes 12,200 lbs. Axle Rating	Yes 12,200 lbs. Axle Rating
DISC BRAKE OPTIONS - BENDIX ADB22X			
Spindle / Hub Material	TIREMAAX	HXL3 / HXL5 Wheel-Ends	 Standard Wheel-End
P-Spindle / DI Single Wheels Dished Out	Yes 11,000 lbs. Axle Rating	Yes 11,000 lbs. Axle Rating	Yes 11,000 lbs. Axle Rating
FF-Spindle / DI or AL Single Wheels Dished In	Not Available	Not Available	Yes 13,500 lbs. Axle Rating

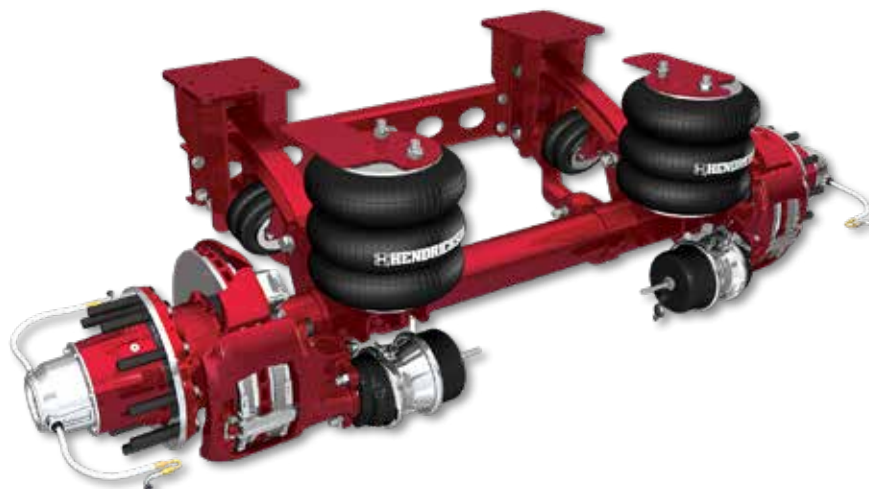

EXF13 Non-Steerable Trailer Model

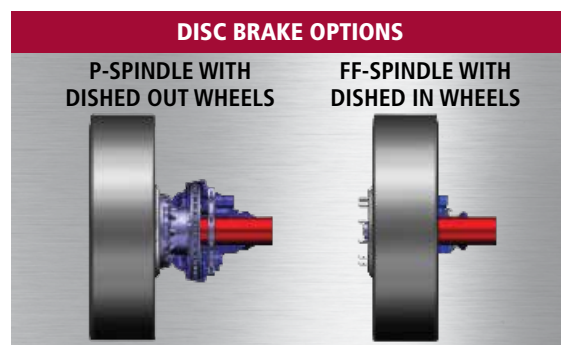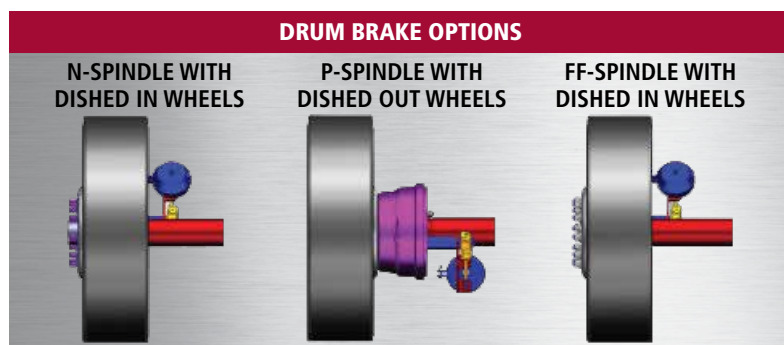

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.

All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration. Contact Hendrickson for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.

Call Hendrickson at **800.660.2829** or **800.668.5360** in Canada for additional information.



www.hendrickson-intl.com

**SPECIALTY PRODUCTS -
AUXILIARY AXLE SYSTEMS**
277 North High Street
Hebron, OH 43025 USA
800.660.2829
740.929.5600 • Fax 740.929.5601

Hendrickson Canada
250 Chrysler Drive, Unit #3
Brampton, ON Canada L6S 6B6
800.668.5360
905.789.1030 • Fax 905.789.1033

H859 03-21

© 2021 Hendrickson USA, L.L.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, L.L.C., or one of its affiliates, in one or more countries, except for Freightliner and the Freightliner logo which are owned by Daimler Trucks North America L.L.C. Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected.

Printed in United States of America