

HTA[®] HENDRICKSON TRAILER AXLE[™]

- Proven performance
- Industry-standard trailer axle
- Less downtime



Worldwide Product Support

As a leading supplier to the global commercial vehicle market, Hendrickson boasts a wide breadth of product and application knowledge. Our sales and service teams are available to provide support – from applications advice to onsite training.

Low-Maintenance

Hendrickson's product testing and specifications provide durable, low-maintenance parts. The HTA[®] system features a robust design that has durability in mind. From heat treated spindles to hardened cam heads, journals and splines, the HTA is ready for mile after mile.

Outstanding Warranty Coverage

Hendrickson's industry-leading warranty guarantees outstanding coverage and support from a recognized name in the commercial vehicle industry and the convenience of a single source supplier.

To learn more about HTA Hendrickson Trailer Axles, call 866.743.3247 or visit www.hendrickson-intl.com

 **HENDRICKSON**
The World Rides On Us[®]

Air Disc Brakes WABCO PAN22


Brakes and RTR® Wheel-Ends

- 20,000-pound capacity
- 16.5 × 7-inch standard service – fast change shoes using Hendrickson proprietary 20K lining
- E-Coated brake shoes for protection against rust jacking
- Forged S-cams with hardened head, journals and splines
- Lightweight outboard mounted cast iron brake drums
- Cam shafts removable without removing the hub
- ABS ready
- 11.25-inch and 335mm bolt circles
- Premium Federal Mogul seal
- Hendrickson's patented axle filter and axle venting system
- Patented PRECISION240® and PRECISION320® system allows for ultra precise bearing adjustment
- HXL Hendrickson Extended-Life System standard with a 6-year parts and labor warranty*

Axle Bar

- Heat treated five-inch diameter axle
- Heat treated, hot-formed HN and HP spindles
- 20,000 pound capacity
- 71.5-inch to 77.5-inch axle tracks
- Axle bar warranted for 7-year parts / 7-year labor, extended warranties available*

* For complete warranty terms, conditions and limitations, see the current version of Hendrickson's Comprehensive Warranty Statement L583 (available at www.hendrickson-intl.com) or call Hendrickson.

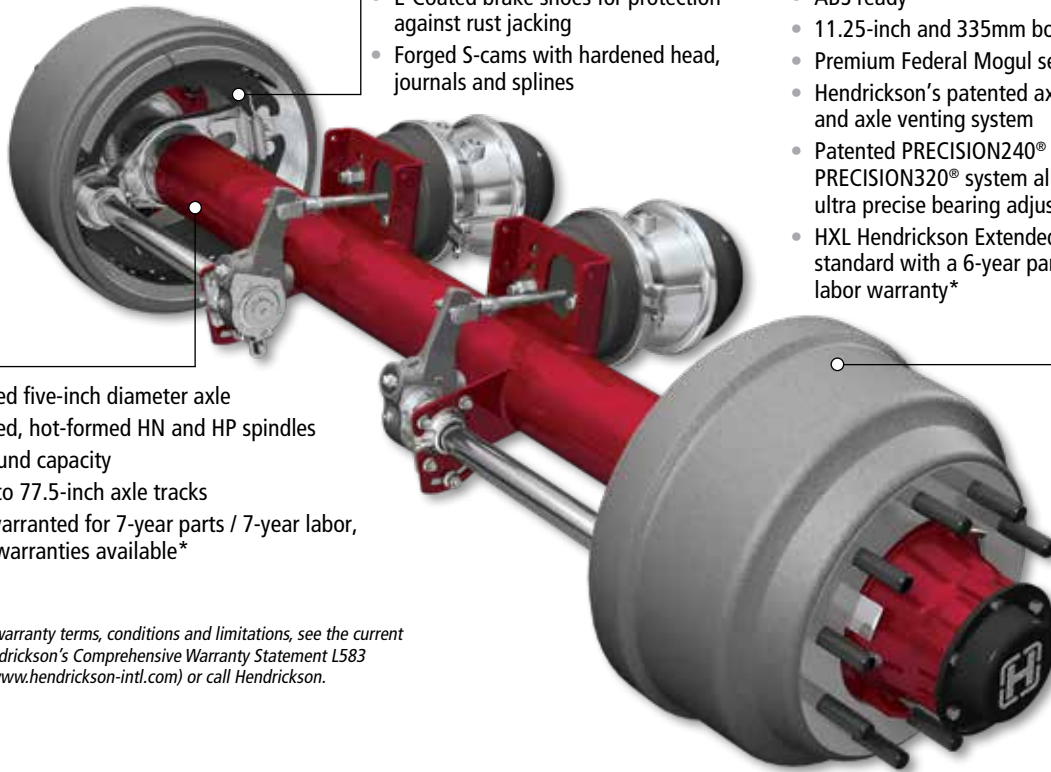

Value-Added Options

- TIREMAAX® PRO and CP tire inflation systems help maximize tire life and maintain peak fuel mileage
- 16.5 × 7-inch HXS® and 16.5 × 8.625-inch HXS Hendrickson Extended Service™ brakes extend intervals between brake service
- 5.5- or 6-inch auto slack adjusters and manual slack adjusters available
- Brake chambers in various configurations
- ABS sensor installation available
- Dura-Light Hub® and aluminum hubs available
- Dust shields available
- Spring seat installation available
- 1/2- to 3/4-inch axle wall thickness available

See TIREMAAX brochure - L1199

Specifications

| Model | Suspension Capacities (pounds) | Axle Diameter (inches) | Tracks (inches) | Base Model Weight (pounds) |
|-------|--------------------------------|------------------------|-----------------|----------------------------|
| HTA | 20,000 | 5 | 71.5 to 77.5 | 693 to 704 |

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.

All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration. Contact Hendrickson for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.

Call Hendrickson at **330.489.0045** or **866.RIDEAIR (743.3247)** for additional information.



www.hendrickson-intl.com

TRAILER COMMERCIAL VEHICLE SYSTEMS
 2070 Industrial Place SE
 Canton, OH 44707-2641 USA
 866.RIDEAIR (743.3247)
 330.489.0045 • Fax 800.696.4416

Hendrickson Canada ULC
 2825 Argenta Road, Unit #2 - 4
 Mississauga, ON Canada L5N 8G6
 800.668.5360
 905.789.1030 • Fax 905.802.9423

Hendrickson Mexicana
 Circuito El Marqués Sur #29
 Parque Industrial El Marqués
 Pob. El Colorado, Municipio El Marqués,
 Querétaro, México C.P. 76246
 +52 (442) 296.3600 • Fax +52 (442) 296.3601

L1223 Rev C 01-22

© 2017 - 2022 Hendrickson USA, L.L.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, L.L.C., or one of its affiliates, in one or more countries. Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected.

Printed in United States of America